

## 2.10 Transport Bounds

We have seen how difficult it is to calculate the volume flux  $Q$  of a hydraulically controlled, rotating flow when idealizations such as uniform potential vorticity and rectangular cross section are relaxed. Although calculations are still possible through numerical means, one might first ask whether any general statements about  $Q$  can be made without regard to the details of  $q$  and  $h$ . An approach developed by Killworth and McDonald (1993) and Killworth (1994) is to seek bounds on  $Q$  in terms of simple measures of the upstream flow and the channel geometry. Given some information about the available energy, one simply attempts to find the maximum  $Q$  that can be forced through a section of a channel with a given geometry. Although the bounds are formulated without reference to hydraulic control, the result bears a remarkable similarity to hydraulic laws developed in early sections.

The topographic cross section is arbitrary and it is only assumed that the bottom is wetted continuously across, so that the flow occurs in one coherent stream. In contrast to the situation in typical hydraulic models,  $B(\psi)$  need not be conserved from one section to the next. However, it is most meaningful to imagine that all the streamlines that cross through the section originate in an upstream basin where the maximum  $B$  is equal to  $E$ . This maximum applies only to those basin streamlines that make their way to the sill section. If non-conservative processes are then limited to a quadratic bottom drag,  $B(\psi)$  can only decrease along a particular  $\psi$  and the maximum  $B$  at any downstream section must be equal to or less than  $E$ . These ideas require some modification if the streamlines originate far downstream (as in Figure 2.9.4) or are part of a local closed gyre (Section 2.7). Although the section in question may lie anywhere, the tightest bound is obtained at the sill, meaning the section with the highest minimum bottom elevation across the flow,  $h_{min}$ . The smallest possible value that  $B$  (nondimensionally  $v^2 / 2 + d + h$ ) can possibly have occurs when the depth  $d$  and velocity  $v$  are zero at  $h = h_{min}$ . It follows that

$$h_{min} \leq B(\psi) \leq E \quad (2.10.1)$$

In addition to geostrophy, the chief assumption made is that the potential vorticity of the flow is non-negative.

Now consider a hypothetical flow at the sill section (Figure 2.10.1a). The layer thickness is assumed to go to zero at the edges  $x=-a$  and  $x=b$  of the stream, but the side walls could just as well be vertical. The surface or interface may have segments of negative slope indicating  $v < 0$ . The bound on  $Q$  is formulated by making a sequence of changes to the flow, each of which maintains or increases the original flux. This will lead to a simplified state for which a bound may be formulated.

The first step is to excise any segments of reverse flow along the side walls, so that the new edges of the current lie at  $x=b'$  and  $x=-a'$  (Frame b). A vertical wall now exists at  $x=b'$ . We next alter the bottom topography the left of  $x=-a'$  such that it becomes

flat and has the elevation  $h_{\min}$  (Frame c). Over this flat portion we add a positive region of flow that brings the layer depth smoothly to zero at a point  $x=-a''$ . The width of the side region is arbitrary. None of the alterations thus far could decrease the volume flux. The flux of the altered flow is given by

$$\int_{-a}^b v dx = \int_{-a}^b (z_s - h) v dx = \frac{1}{2} (z_s^2(b) - z_s^2(-a)) - \int_{-a}^b h \frac{\partial z_s}{\partial x} dx \geq Q \quad (2.10.2)$$

where  $z_s = d + h$ .

We next eliminate any interior minima in  $z_s$  slicing off the top of the mound of water to the left of any such minima (Frames c and d). The segment extending from  $x=x_1$  to  $x=x_2$  in the figure is therefore replaced by a quiescent region, and the same is done to the left of any remaining minima. To prove that this operation cannot increase the flux note that for the Figure 2.10.1.c flow we have

$$z_s(x_2) = B(\psi(x_2)) \quad (2.10.3)$$

and

$$\frac{1}{2} v(x_1)^2 + z_s(x_1) = B(\psi(x_1)). \quad (2.10.4)$$

Since  $z(x_1) = z(x_2)$ ,

$$B(\psi(x_1)) - B(\psi(x_2)) = \frac{1}{2} v(x_1)^2 > 0 \quad (2.10.5)$$

Finally, the previous assumption of positive potential vorticity  $q$  along with the relationship  $dB/d\psi = q$  means that  $B$  must increase with  $\psi$  and thus

$$\psi(x_2) - \psi(x_1) \leq 0. \quad (2.10.6)$$

The flux to be removed must therefore be non-positive.

The end result of this surgery is a water surface rising monotonically to the right, so the stream has positive or zero velocity everywhere across the channel with flux equal to or greater than the original. A bound on the altered flow can be formulated beginning using definition (2.10.2) of flux:

$$\frac{1}{2} (z_s^2(b') - z_s^2(-a'')) - \int_{-a''}^{b'} h \frac{\partial z_s}{\partial x} dx, \quad (2.10.7)$$

Since  $\partial z_s / \partial x$  is non-negative, the integral in the above expression cannot be less than

$$\int_{-a''}^{b'} h_{\min} \partial z_s / \partial x dx = h_{\min} (z_s(b') - z_s(-a'')) = h_{\min} (z_s(b') - h_{\min}), \quad (2.10.8)$$

The original flux  $Q$  is therefore bounded according to

$$\begin{aligned} Q &\leq \frac{1}{2} (z_s^2(b') - z_s^2(-a'')) - \int_{-a''}^{b'} h \frac{\partial z_s}{\partial x} dx \\ &\leq \frac{1}{2} (z_s^2(b') - h_{\min}^2) - h_{\min} (z_s(b') - h_{\min}) = \frac{1}{2} (z_s(b') - h_{\min})^2 \end{aligned} \quad (2.10.9)$$

Now  $z_s(b')$  cannot exceed the maximum value  $E$  of the Bernoulli function, and therefore  $Q \leq \frac{1}{2} (E - h_{\min})^2$ . Also, if we associate with  $E$  an equivalent surface elevation  $h_{\min} + \Delta z_E$ , then the transport bound becomes  $Q \leq \frac{1}{2} \Delta z_E^2$  or, in dimensional terms:

$$Q^* \leq \frac{g(\Delta z_E^*)^2}{2f}. \quad (2.10.10).$$

There are a number of examples, all with rectangular cross sections and all with separated sill flow, for which the right-hand side of (2.10.10) gives the exact flux. The first is the case of flow from an infinitely deep and quiescent basin across a sill (Section 2.4). Here  $\Delta z_E^*$  is just the reservoir head,  $\Delta z$  of (2.4.15), and is a constant over the upstream basin. We also argued in Section 2.6 that any separated sill flow that stagnates along the right wall is critical and that the corresponding flux is given by interpreting  $\Delta z_E^*$  as  $\Delta z_R^*$ , the upstream elevation along the right wall. If  $q (=dB/d\psi)$  is non-negative, and the reservoir flow is unidirectional, then  $\Delta z_R^*$  does indeed represent the maximum upstream value of the Bernoulli function and (2.10.10) is exact. In both of these cases the flow is either positive or zero at the edges, so that no fluid need be excised from the end points (Figure 2.10.1a,b). Also, since the bottom is horizontal, the shaving off of mounds of fluid (Figure 2.10.1c) does not alter the volume flux. Therefore the sequence of steps taken to formulate the bound results in no decrease in transport. The cases serve notice that the bound is achievable.

The fact that (2.10.10) is achievable in two examples with rectangular cross-sections suggests that departures from this geometry might generally tend to reduce the flux. However, if the geometry is sufficiently irregular that the flow becomes divided into two or more streams, then the combined flux can exceed the bound, though (2.10.10) continues to hold for each individual stream. Whitehead (2003) presents an example. Simply put, the formation of multiple streams is similar to the existence of multiple openings through which fluid may drain from the basin.

Killworth and McDonald (1993) have shown that the bound can be extended to a fluid with  $N$  layers, each with its own uniform density, and all lying below a deep and inactive upper fluid. The volume flux  $Q_n$  in layer  $n$  is according to

$$F_n \leq \frac{g_n}{2g} (E_n - h_{\min})^2, \quad (2.10.11)$$

where  $g_n$  is the reduced gravity and  $E_n$  is the maximum Bernoulli function for that layer, the latter defined with the same restriction as the single-layer case.

### Figure Captions

Figure 2.10.1 Series of surgical procedures used to alter a given flow (a) in order to produce a simpler flow (d) whose transport is known. The transport cannot be decreased in any step and thus the transport of (d) acts as a bound. (Based on a figure in Killworth and MacDonald, 1993).

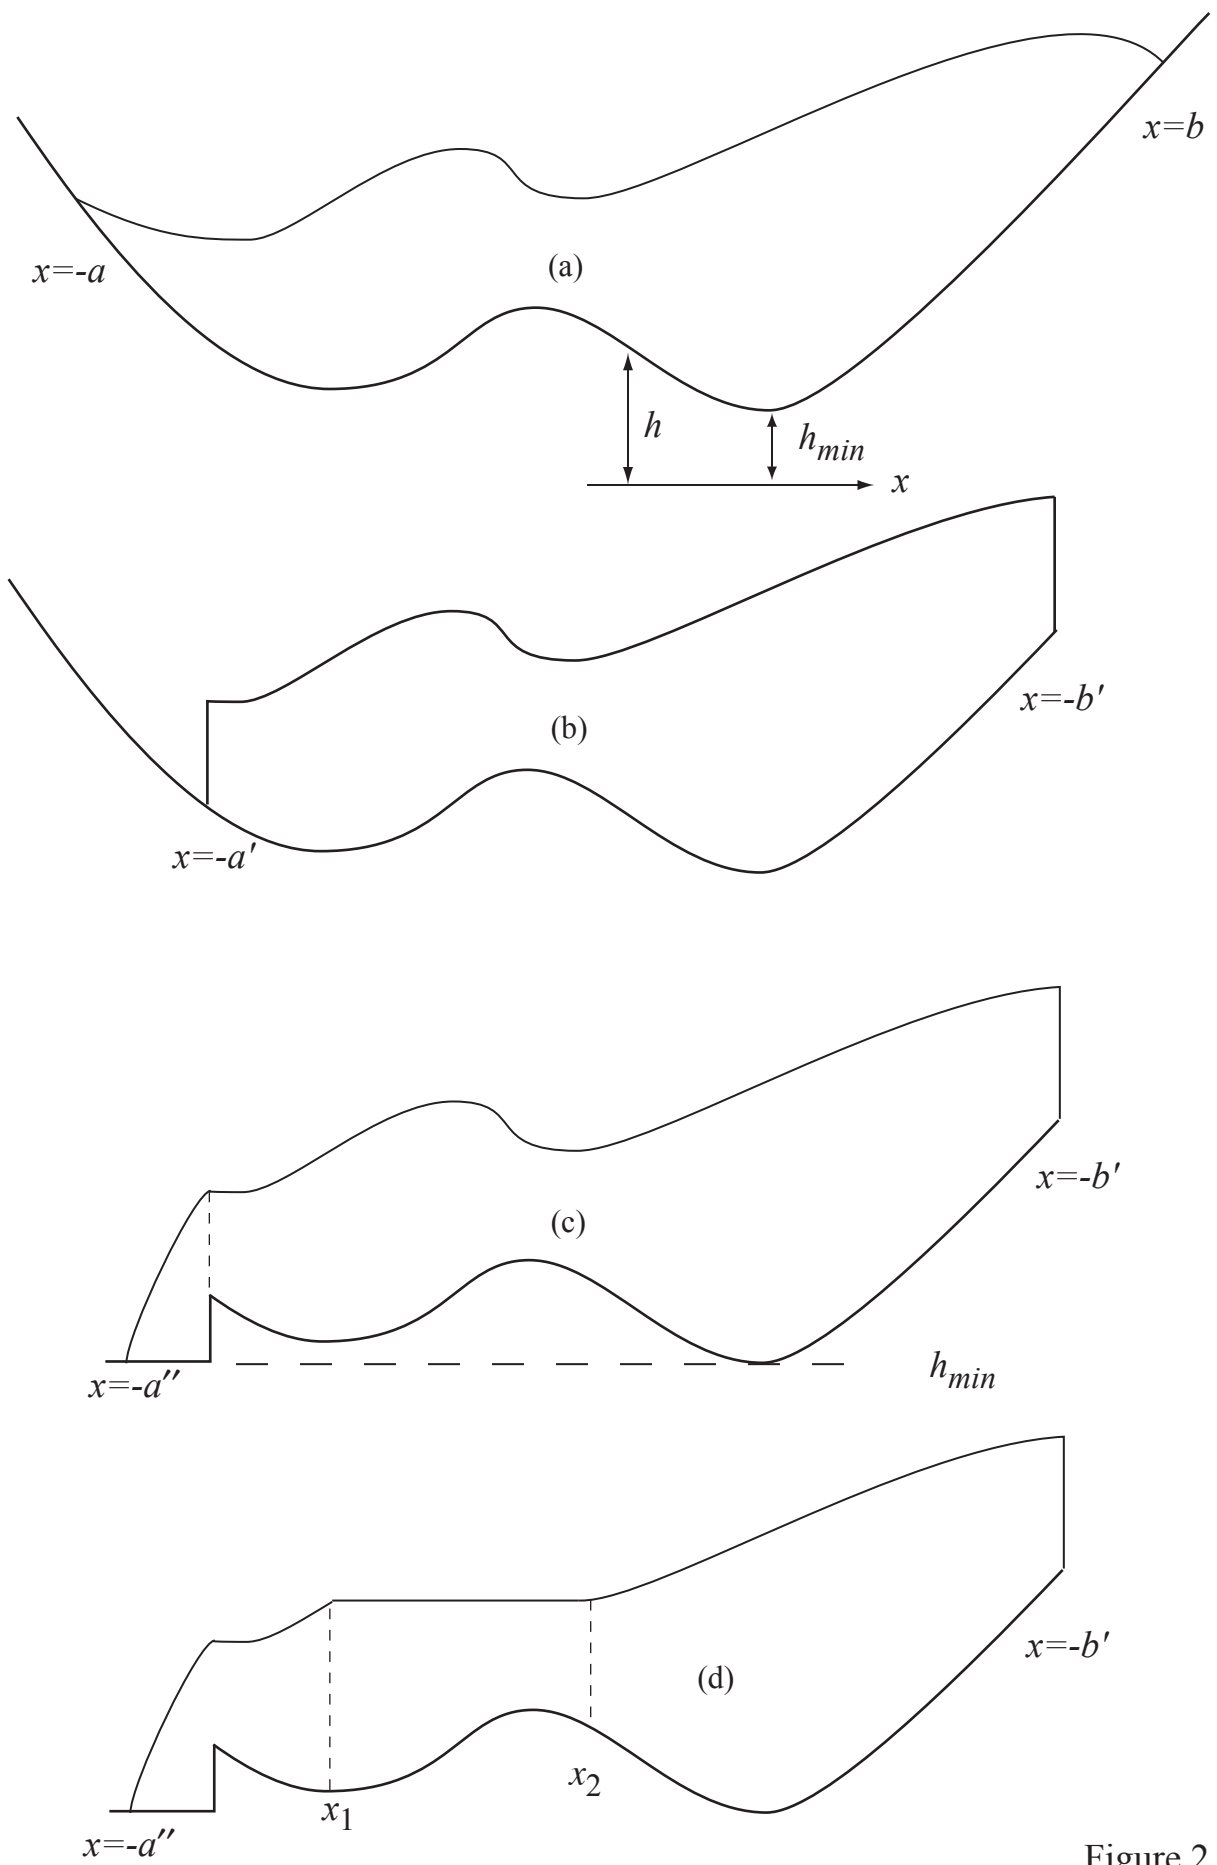


Figure 2.10.1